

BEST IN CLASS PROTECTION

TH3 P R SL PAPR SYSTEM





TH3: inward leakage max. 0.2%

NPF = **500**

TH2: inward leakage max. 2%

NPF = **50**

TH1: inward leakage max. 10%

NPF = **10**

Based on EN 12941


- TH3 P R SL best in class (see table opposite)
- P3 filter with increased surface area
- Light weight 990 g and easy to operate
- Replaceable and rechargeable Li-ion battery 7.4V/5200mAh. Charging time: 5 hours
- Replacement filter available
- Fitted with flame retardant supporting belt and hose cover for prolonged operational time
- Operation time up to 9 hours
- Noise level 75dBA

FEATURE	BENEFIT	IMPACT	
TH3/P3	Highest rating	Worker safety	
4 cell lithium battery	Longer life	8 hours battery life (almost full shift), increasing productivty	
Positve click on/off switch	Ease of use	Worker confidence as to mode selection	
Fire retardant belt	Worker protection	Fit for purpose in fire retardant work areas	
Audible alarm	Worker aware of product status, indidates battery low or filter blocked	Worker health and safety	
Auto 'charged' off sensor	Extends life of the battery and stops overcharging	Confidence when charging after hours. Product last longer.	

CE 0194


EN 12941:1998+A1:2003+A2:2008 TH3 P R SL

R60 AIRMAX PAPR SYSTEM				
Code			Case Content	
J7050	AIRMAX PAPR SYSTEM WITH DUO WELDING HELMET 4/9-13 ADF		1	
R60 AIRMAX PAPR SPARE PARTS & ACCESSORIES				
Code		Img	Case Content	
J7063	AirMax-AIR WELDING PAPR HOSE & Cover	1	1	
J7064	AirMax-AIR WELDING PAPR HOSE COVER	2	1	
J7065	AirMax-AIR WELDING PAPR MOTOR	3	1	
J7210	AirMax-AIR Welding P3 PAPR Filter	4	1	
J7067	AirMax-AIR WELDING PAPR CHARGER	5	1	
J7068	AirMax-AIR WELDING PAPR 4C BATTERY	6	1	
J7069	AirMax-AIR WELDING PAPR WAIST BELT	7	1	

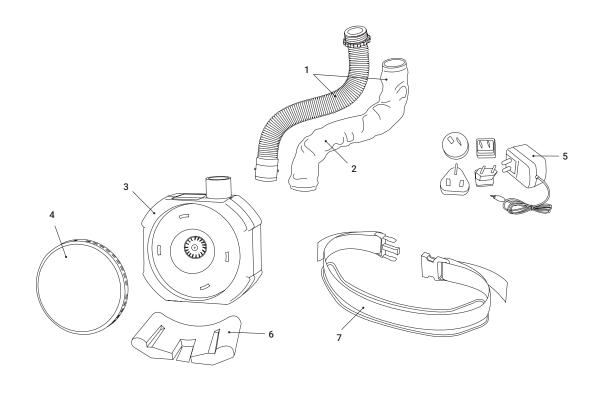

COMBINABLE WITH:





A/Une/Eine/Una/La







